
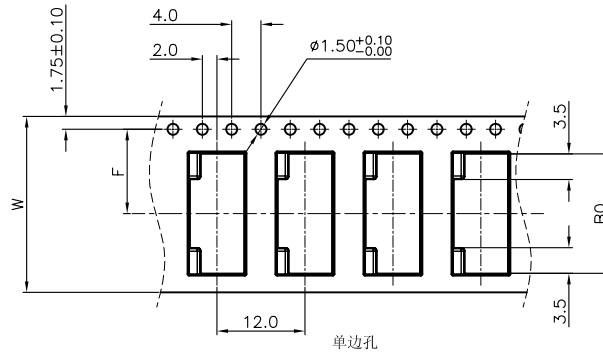
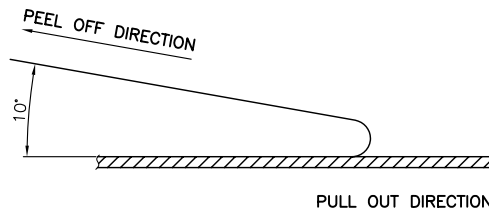


NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE.±0.20mm
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: 0.35 ± 0.05 mm.
6. PACKING LENGTH PER 13" REEL : 18.60METERS.
7. COMPONENT LOAD PER 13" REEL : 1500PCS
8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~100gf).

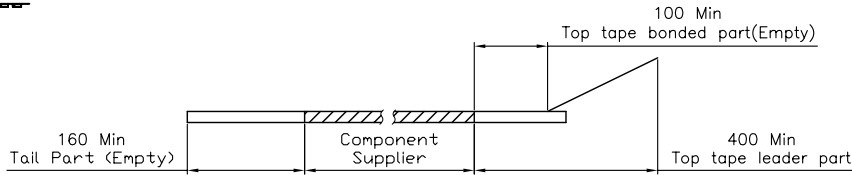

CKTS	B0±0.10	W	W1	F	S0±0.10
4	11.30	24+0.3/-0	24.4	11.5±0.10	单边孔
5	12.30				
6	13.30				
7	14.30				
8	15.30				
9	16.30	32±0.30	32.4	14.2±0.10	28.4
10	17.30				
11	18.30				
12	19.30				
13	20.30				
14	21.30	44±0.30	44.4	20.2±0.15	40.4
15	22.30				
16	23.30				
17	24.30				
18	25.30				
19	26.30				
20	27.30				
21	28.30				
22	29.30				
23	30.30				
24	31.30	56±0.30	56.4	26.2±0.15	52.4
25	32.30				
26	33.30				
27	34.30				
28	35.30				
29	36.30				
30	37.30				

CLASSIFICATION DIMENSION (尺寸类别):
 FA1 (首次检验): (M) To (M)
 ■ MARK IS MAJOR DIM (重点尺寸标示)
 * (C) MARK IS CRITICAL DIM (Cpk&Cp 标示)

Tolerance Unspecified (未注公差)
 0.0 ±0.10 0° ±3°
 0.00 ±0.05 0°0 ±2°
 0.000 ±0.02 0°00 ±1°

Project View (投影视图)
 10 OF 10
 Rev (版本): 1.0

深圳市钜硕电子有限公司

Product Name (产品名称): 1.0Pitch H=2.5 FPC 拉拔卧式K型. 载带		
Product No (产品料号): EB-740XXX290-00		
Drawing No (图面编号): DNE00015-1	Date (日期): 2011/04/09	
Designer (设计): Allan 04/09'11	Checked (审核):	Approved (核准):

Rev 版本	Date 日期	Revisor 制/修订人
1.0	2011/04/09	Allan

