

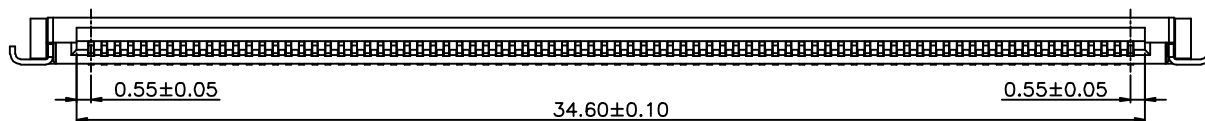
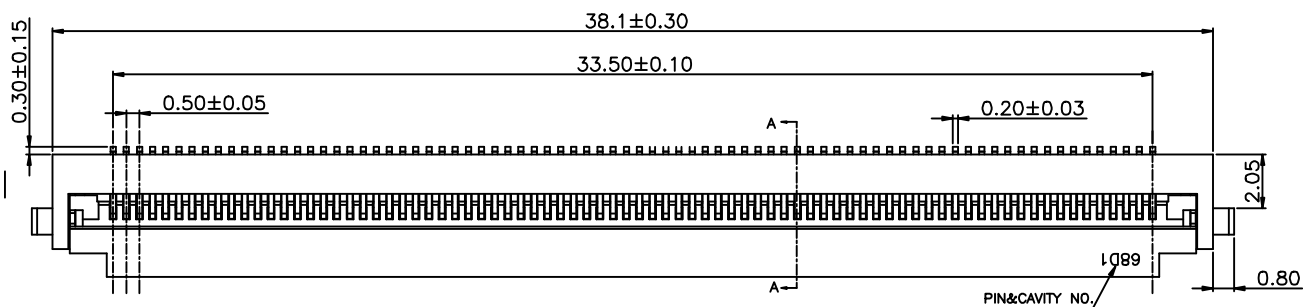



环保要求 RoHS 2.0




NOTES:
 1.MATERIAL:
 HOUSING:THERMOPLASTIC(UL94V-0) NATURE
 ACTUATOR:THERMOPLASTIC(UL94V-0) BLACK
 TERMINAL:PHOSPHOR BRONZE PLATED GOLD MIN 1u" FOR SOLDERING
 AREA AND CONNECT AREA, PLATED NI MIN 30u" FOR ALLOVER UNDER.
 FITTING NAIL:PHOSPHOR BRONZE MATTE TIN MIN 80u" PLATED FOR ALLOVER PLATED NI MIN 30u" FOR ALLOVER UNDER.
 2.SPECIFICATION
 CURRENT RATING: 0.5A 50VAC/DC
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 100MΩ MIN AT 500V DC
 OPERATING TEMPERATURE RANGE: -25°C TO +85°C
 WITHSTANDING VOLTANG: 500V AC/minute



SECTION A-A
SCALE 2:1

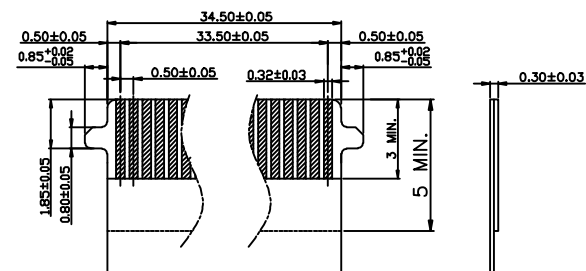

RECOMMENDED FFC DIM.
WITH LOCK

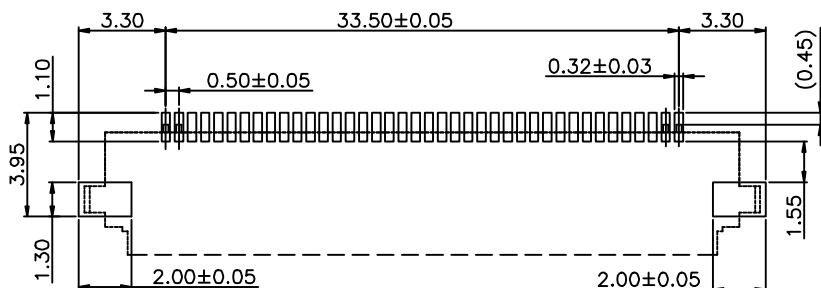

P.C.B LAYOUT REF
TOLERANCE:±0.05

深圳市钜硕电子有限公司 SHENZHEN JUSHUO ELECTRONIC CO.,LTD				产品料号: AFC18-S68FIA-00			
UNLESS OTHERWISE SPECIFIED		APPROVED BY		DATE		TITLE	
TOLERANCES ARE		CHECKED BY		DATE		FPC CONN. 0.5P H1.8	
XX ±0.30		DRAWN BY		DATE		FLIP TYPE 68Pin 成品图	
XXX ±0.20						DOCUMENT NO	
XXX ±0.10							
ANG ±1°							
UNIT	SIZE	DRAWING NO	REV	SHEET	SCALE		
MM	A4		A	1/1	1:1		
TION	CHK	DATE					