

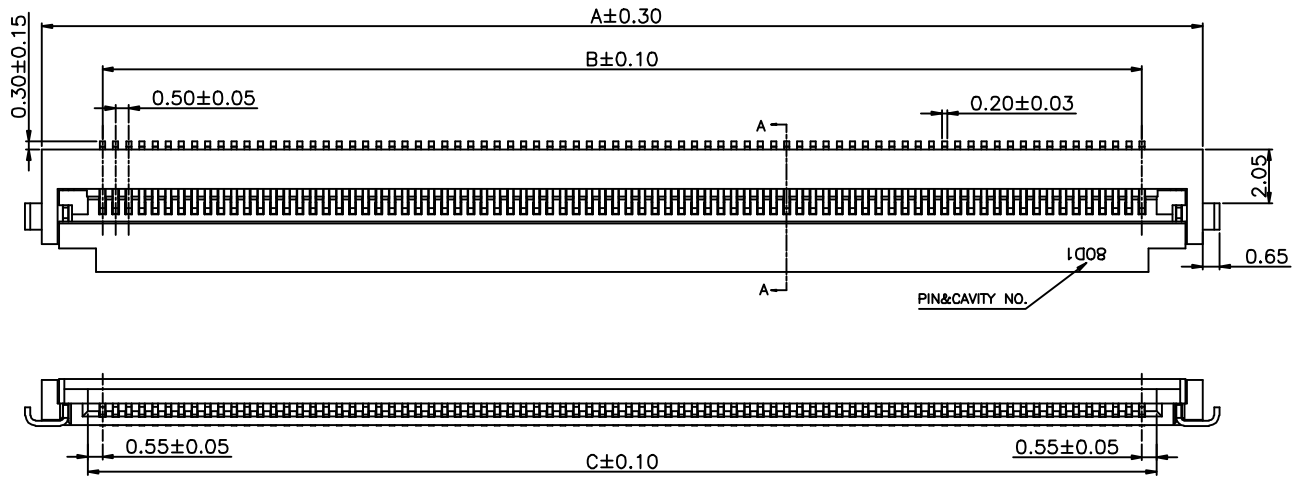
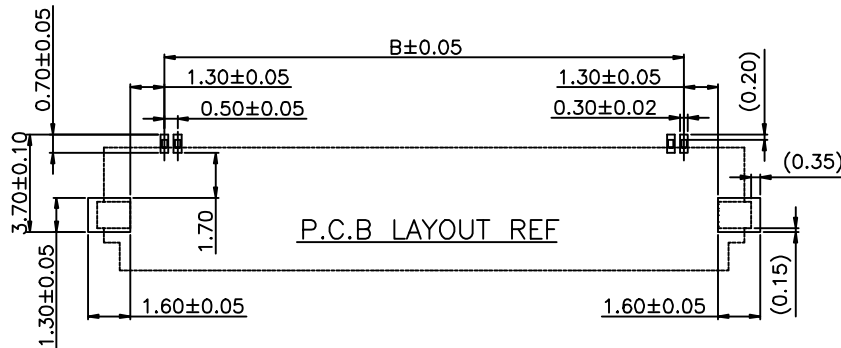

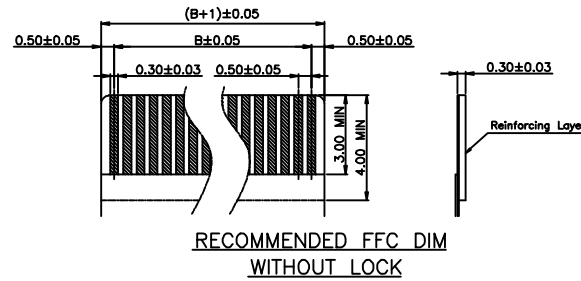


环保要求 RoHS 2.0

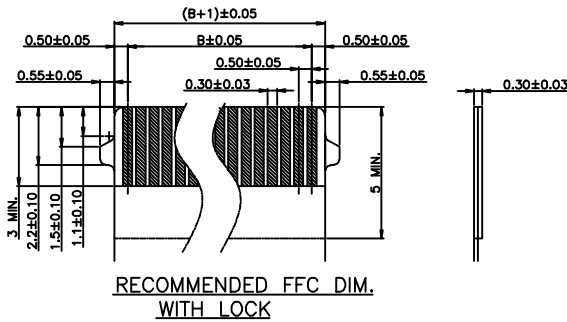

NOTES:
 1.MATERIAL:
 HOUSING:THERMOPLASTIC(UL94V-0) NATURE
 ACTUATOR:THERMOPLASTIC(UL94V-0) BLACK
 TERMINAL:PHOSPHOR BRONZE PLATED GOLD 1u" FOR SOLDERING AREA AND CONNECT AREA, PLATED NI MIN 30u" FOR ALLOVER UNDER.
 FITTING NAIL:PHOSPHOR BRONZE MATTE TIN MIN 80u" PLATED FOR ALLOVER PLATED NI MIN 30u" FOR ALLOVER UNDER.
 2.SPECIFICATION
 CURRENT RATING: 0.5A 50VAC/DC
 CONTACT RESISTANCE: 40mΩ MAX
 INSULATION RESISTANCE: 100MΩ MIN AT 500V DC
 OPERATING TEMPERATURE RANGE: -25°C TO +85°C
 WITHSTANDING VOLTANG: 500V AC/minute



料号	Pin数(N)	A	B	C
AFC18-S80FIA-00	80	44.1	39.50	40.60
深圳市钜硕电子有限公司 SHENZHEN JUSHUO ELECTRONIC CO.,LTD		产品料号: AFC18-S80FIA-00		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE XX ±0.30 XXX ±0.20 XXX ±0.10 ANG ±0°30'	APPROVED BY	DATE	TITLE FPC CONN. 0.5P H1.8 FLIP TYPE 成品图	
	CHECKED BY	DATE	DRAWN BY	
			DATE	DOCUMENT NO
				PAGE 1
UNIT MM	SIZE A4	DRAWING NO	REV A	SHEET 1/1
TION	CHK	DATE		SCALE 1:1